


Ettgreps servantbatteri, Viskan



Beskyttelsesmodul AA

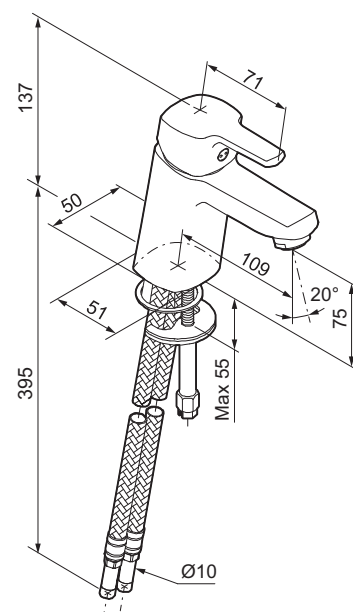

- Kaldstart
- Eco Flow konstantvannmengde 5 l/min ved 2-6 bar
- Vannmengdebegrenser og temperatursperre
- Fleksible Soft PEX[®]-rør med 10 mm spiss

Utførelse	FMM nr	NRF nr
Krom. Energiklasse B	49500000	4300082